



**BRUNO ANTUNES**  
**MODERNISER LE**  
**DEVELOPPEMENT**  
**WORDPRESS**



BA - AVRIL 2023




# INTRODUCTION








Mon parcours



Les défis actuels du  
développement WordPress




Pourquoi moderniser ?




# FRAMEWORK







Bedrock



Sage avec Acorn





roots.io

### Bedrock structure

```
├── composer.json
├── config
│   ├── application.php    # Primary wp-config
│   └── environments
│       ├── development.php
│       ├── staging.php
│       └── production.php
├── vendor                # Composer dependencies
├── web                   # Public document root
│   ├── app               # WordPress content dir
│   │   ├── mu-plugins
│   │   ├── plugins
│   │   ├── themes
│   │   └── uploads
│   ├── wp-config.php
│   ├── index.php
│   └── wp                 # WordPress core
```

### Standard WordPress structure

```
├── index.php
├── license.txt
├── readme.html
├── wp-activate.php
├── wp-admin
├── wp-blog-header.php
├── wp-comments-post.php
├── wp-config-sample.php
├── wp-content
│   ├── index.php
│   ├── plugins
│   └── themes
├── wp-cron.php
├── wp-includes
├── wp-links-opml.php
├── wp-load.php
├── wp-login.php
├── wp-mail.php
├── wp-settings.php
├── wp-signup.php
├── wp-trackback.php
└── xmlrpc.php
```



The image shows a code editor window titled "icons.blade.php — moba". The editor displays the following code:

```
1  {{-- {{dd($block)}} --}}
2
3  <section class="bg-[#F5F5F5] py-10">
4    <div class="container md:px-5 px-0 mx-auto flex flex-col gap-10">
5      <div>{!!$block->icons['icons_text']!!</div>
6      <div class="grid grid-flow-col auto-cols-fr items-start md:w-4/5 mx-
7        @foreach ($block->icons['icons_items'] as $item)
8          <div class="flex flex-col gap-5 items-center justify-center w-
9            {{ $item['icon_text'] }}</span
11         </div>
12       @endforeach
13     </div>
14     @if ($block->icons_link)
15       <a href="{{ $block->icons_link['url'] }}" target="{{ $block->icons_li
16     @endif
17   </div>
18 </section>
```

The code is a Blade template for rendering a grid of icons. It uses Tailwind CSS classes for styling and Laravel Blade directives for looping and conditional rendering. The code is attributed to Bruno ANTUNES (il y a 6 mois).

The left sidebar shows the file explorer with the following structure:

- EXPLORATEUR
- CHRONOLOGIE
- MOBA
  - partials
    - builder
      - basic.blade.php 6
      - callto\_action.blade.php
      - cascade.blade.php
      - categories.blade.php
      - download.blade.php
      - header.blade.php
      - icons.blade.php
      - kit.blade.php
      - mixed.blade.php
      - newsletter.blade.php
      - paragraph.blade.php
      - partners.blade.php
      - phone.blade.php
      - posts.blade.php 6
      - slider.blade.php
      - tabs.blade.php

The status bar at the bottom indicates the current file is "MOBA-checkout\*", the cursor is at "L 18, col 11", and the editor is using "Espaces : 2", "UTF-8", "LF", "Blade", and "Prettier".





# CAS PRATIQUES





# Debug avec un Error Catcher



# Avant

**Deprecated:** Constant Inpsyde\Wonolog\Data\FILTER\_SANITIZE\_STRING is deprecated in  
**/Users/bantunes/Sites/theafricareport\_website\_2019/vendor/inpsyde/wonolog/src/PhpErrorController.php** on line **100**

**Deprecated:** Constant Inpsyde\Wonolog\Data\FILTER\_SANITIZE\_STRING is deprecated in  
**/Users/bantunes/Sites/theafricareport\_website\_2019/vendor/inpsyde/wonolog/src/PhpErrorController.php** on line **100**

**Deprecated:** Return type of Inpsyde\Wonolog\Handler\HandlersRegistry::count() should either be compatible with Countable::count() attribute should be used to temporarily suppress the notice in  
**/Users/bantunes/Sites/theafricareport\_website\_2019/vendor/inpsyde/wonolog/src/Handler/HandlersRegistry.php** on line

**Deprecated:** Return type of Inpsyde\Wonolog\Processor\ProcessorsRegistry::count() should either be compatible with Countable::count() attribute should be used to temporarily suppress the notice in  
**/Users/bantunes/Sites/theafricareport\_website\_2019/vendor/inpsyde/wonolog/src/Processor/ProcessorsRegistry.php** on



# Après

Moba - connaissez-vous l'état x +

Non sécurisé | moba.test

Symfony Exception Symfony Docs

ErrorException > ViewException > ViewException > ViewException HTTP 500 Internal Server Error

Undefined variable `$wc_cart` (View: /Users/bantunes/Sites/moba/web/app/themes/moba-theme/resources/views/partials/builder/header.blade.php) (View: /Users/bantunes/Sites/moba/web/app/themes/moba-theme/resources/views/partials/builder/header.blade.php) (View: /Users/bantunes/Sites/moba/web/app/themes/moba-theme/resources/views/partials/builder/header.blade.php)

Exception!

Exceptions 4 Stack Traces 4

Illuminate\View\ViewException

in /Users/bantunes/Sites/moba/web/app/cache/acorn/framework/views/3b5c7f51865597a2c7699771e4423aade7a27a4f.php (line 12)

```
7.     style="background: <?php echo e($block->header_bg['header_color']); ?>"
8.     <?php else: ?>
9.     style="background: center/cover url('<?php echo e($block->header_bg['header_image']['url']); ?>') no-repeat"
10.    <?php endif; ?>
11.    <?php endif; ?>
12.    ><?php echo e($wc_cart); ?>
13.
14.    <div class="container md:px-5 px-0 mx-auto flex place-content-center justify-between content-center items-center">
15.      <div class="content basis-1/2">
16.        <div class="mb-10"><?php echo $block->header_content['header_textarea']; ?></div>
17.        <?php if($block->header_content['header_link']): ?>
```

in /Users/bantunes/Sites/moba/web/app/themes/moba-theme/vendor/illuminate/view/Engines/PhpEngine.php -> handleViewException (line 60)







# Du cache sans Transients



Privée < > Non sécurisé — intervalle.test

# Intervalle™

Hire the Best WordPress Developers

wordpress 14 March, 2023

## Guide pour restreindre l'accès à un site WordPress rapidement sans extension

wordpress 08 March, 2023

## Comment modifier l'ordre d'affichage de vos posts WordPress à l'aide d'un champ personnalisé

```
76 /**
77  * Pour les développeurs : le mode débogage de WordPress.
78  *
79  * En passant la valeur suivante à "true", vous activez l'affichage de
80  * notifications d'erreurs pendant vos essais.
81  * Il est fortement recommandé que les développeurs d'extensions et
82  * de thèmes se servent de WP_DEBUG dans leur environnement de
83  * développement.
84  * Pour plus d'information sur les autres constantes qui peuvent être
85  * utilisées pour le débogage, rendez-vous sur le Codex.
86  * @link https://fr.wordpress.org/support/article/debugging-in-wordpress/
87  * @since 2.8.0
88  */
89 define('WP_DEBUG', true);
90
91 define('WP_DEBUG_DISPLAY', true);
92
93 define('WP_DEBUG_LOG', true);
```

ignition 17 February, 2023

## Améliorer significativement le mode debug dans WordPress

woocommerce 12 February, 2023

## Récupérer et manipuler les données d'un produit dans Woocommerce




# Avec Laravel Cache

```
use Illuminate\Support\Facades\Cache;
```

```
Cache::put($cache_key, $articles, now()->addHour());
```



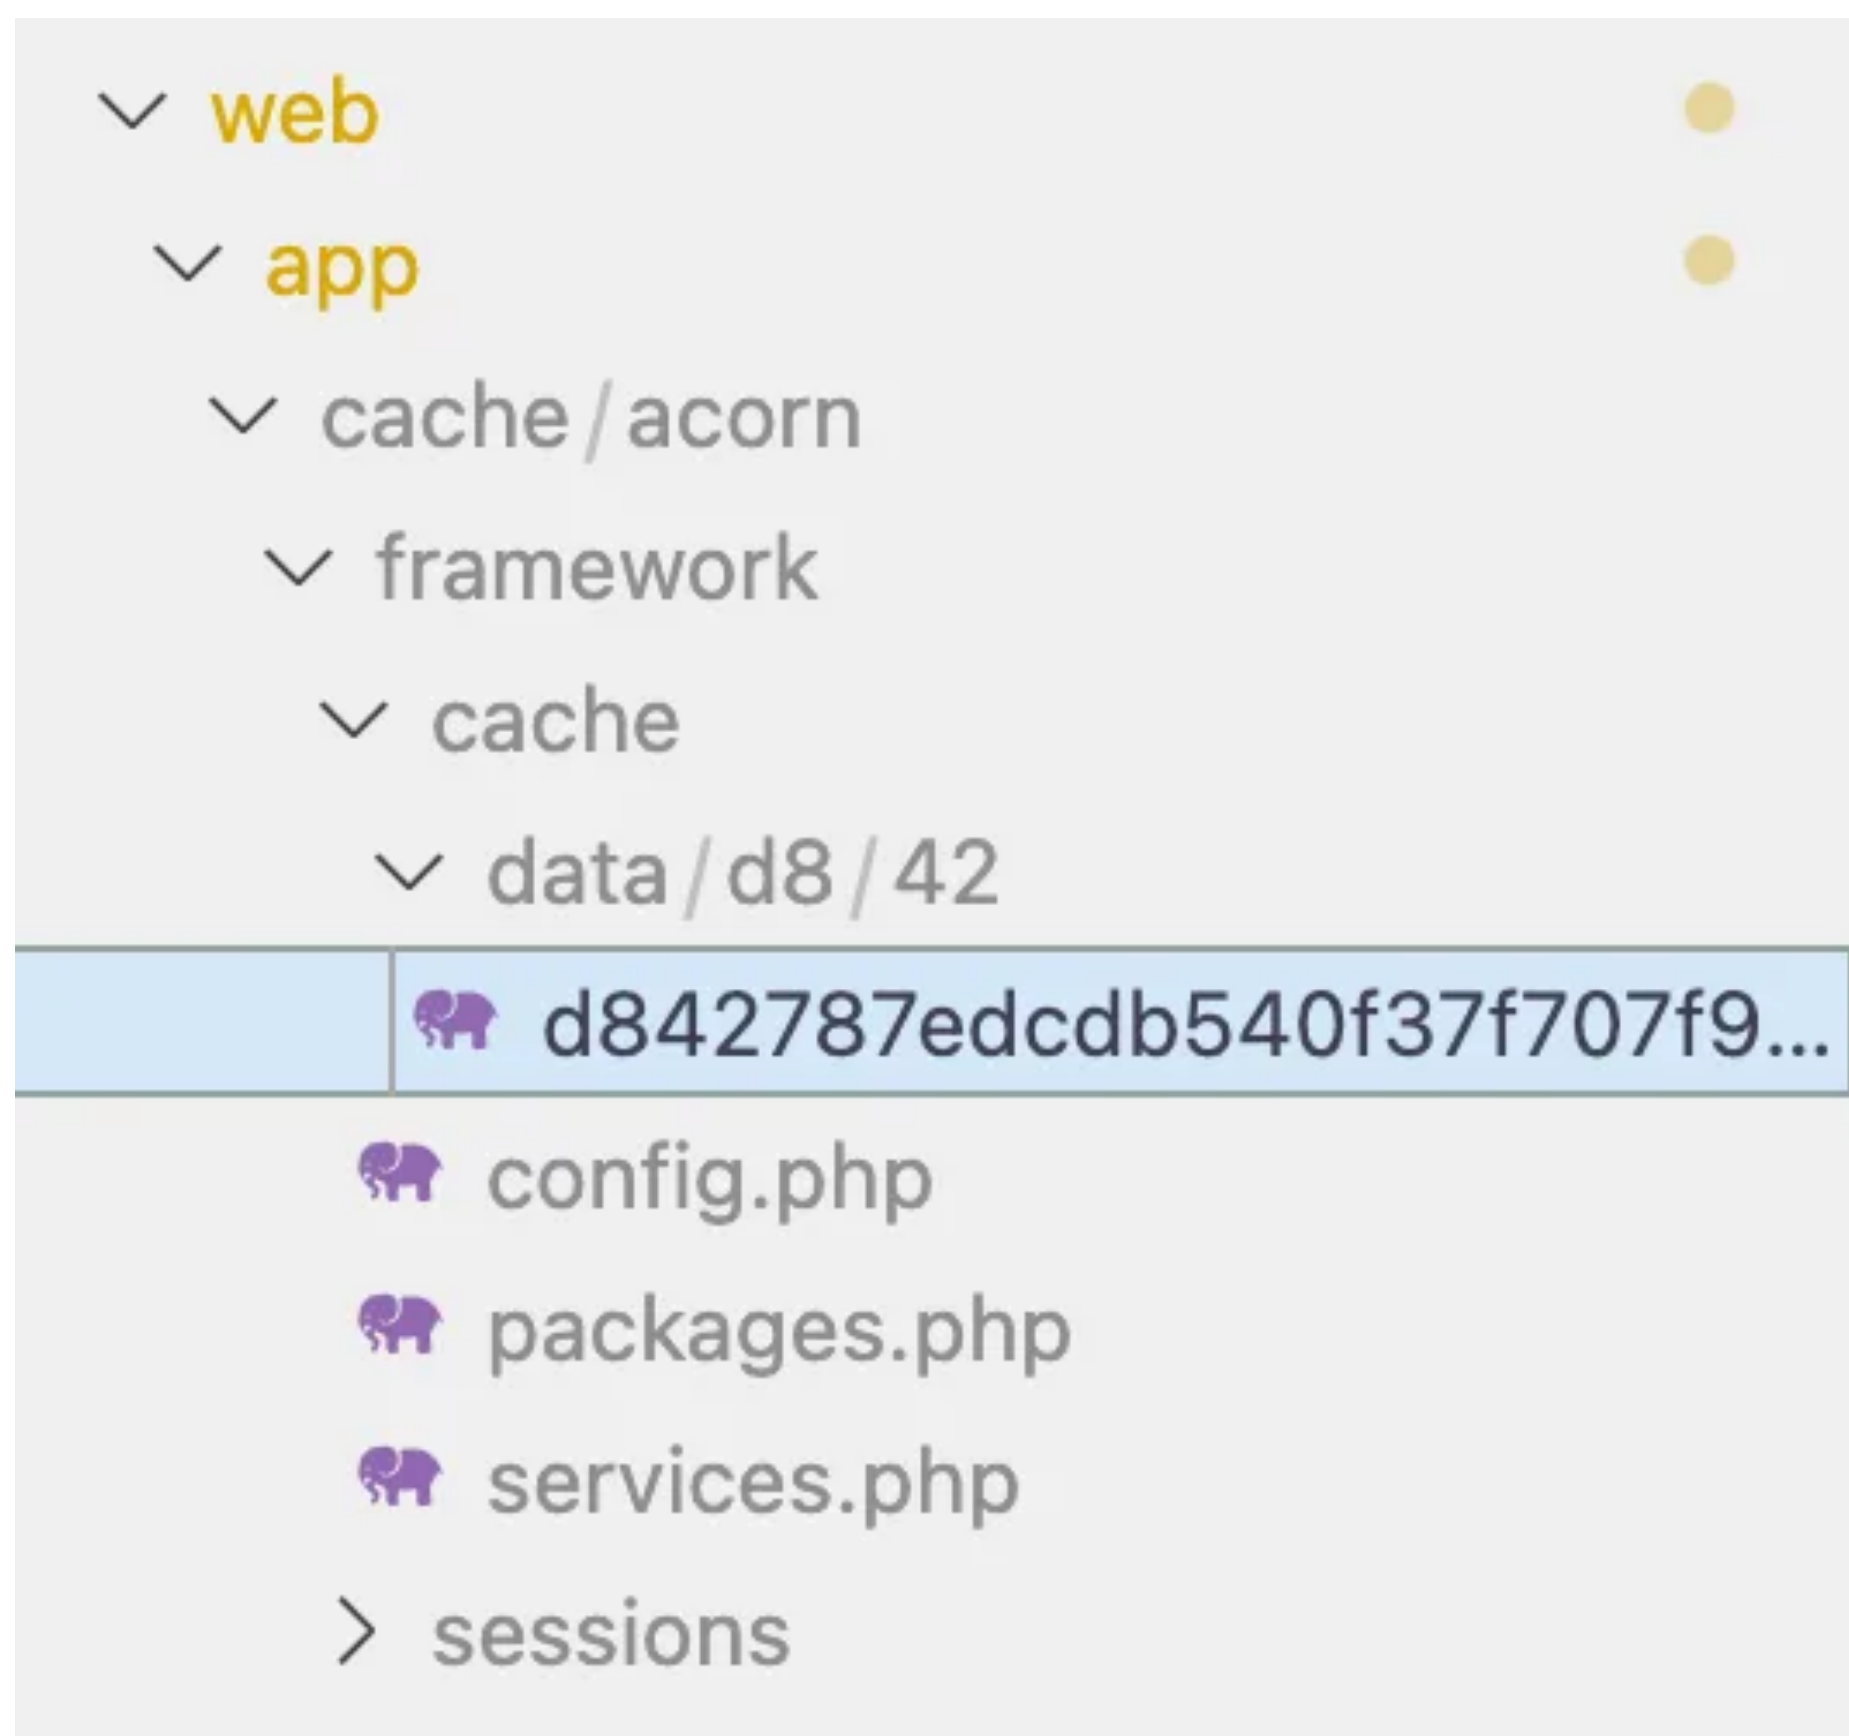

src="https://cdn-images-1.medium.com/ développeurs qui ont adopté un workfl <strong>Bedrock</strong> ou <strong>S </strong><strong>Roots</strong></a>.</p><p>A au lieu de le faire avec les Transien href="https://roots.io/acorn/">Acorn< href="https://roots.io/sage/">Sage</a> des Composers, dans le passé Controll vues et bien d'autres.</p><p>Bedrock Sage a quant à lui a été un véritable de l'orienté objet dans WordPress.</p> peut aujourd'hui s'utiliser en standa p><p>● Composants Laravel supportés</p> </div>





## **Bruno ANTUNES**

Développeur PHP spécialisé WordPress  
PHP, Clean code avec Bedrock et Sage,  
Blade, ACF Builder, TailwindCSS.

<https://bento.me/bantunes>





MERCI !

